


## SUBSEA SAW 30 – 120 MM

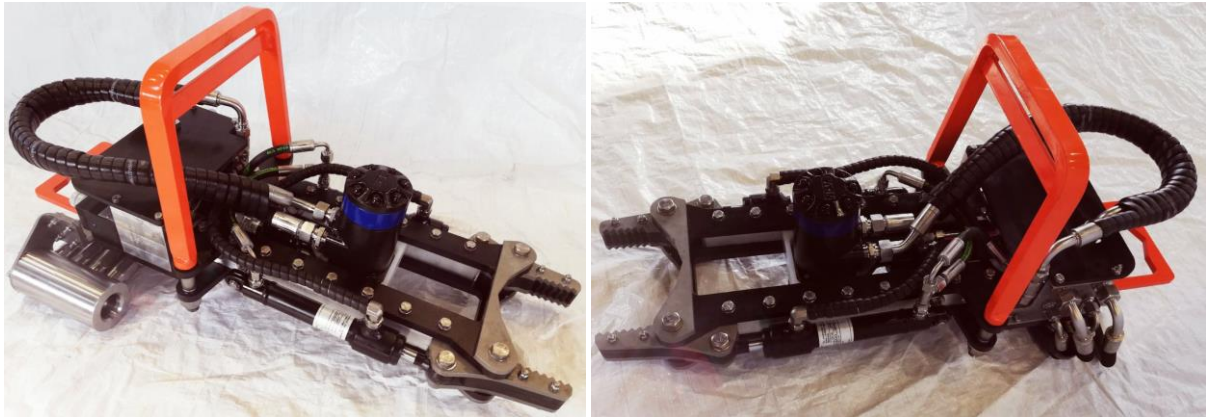

The IKM Subsea manipulator held **Subsea Saw** has a long track record. It is designed to cut steel pipes, steel profiles, flexible risers/cables and chains from 30mm up to 120mm.

### SPECIFICATIONS

<b>Type</b>	Subsea saw
<b>Model</b>	30 – 120 mm
<b>Part number</b>	IKM-1070377
<b>Dimensions LxWxH</b>	845 x 355 x 351 mm
<b>Cutting diameter</b>	Ø30 – Ø120
<b>Motor</b>	46 cc
<b>Recommended feeding rate</b>	15-25 mm/min
<b>Hydraulic connections</b>	2x ½" BSP (HF) 2x ¼" BSP (LF)
<b>Hydraulic pressure</b>	165-185 bar
<b>Hydraulic flow</b>	50-55 LPM
<b>Weight in air</b>	23,5 kg
<b>Weight in water</b>	17,8 kg
<b>Number of hydraulic connections</b>	4 hoses (two functions)  HF: Minimum NG6 Valve LF: NG4 or NG3 Valve

- Claws can be designed to fit various interfaces as needed.
- Standard blades to be supplied with saw are carbide and diamond types.
- HF: Minimum NG6 Valve
- LF: NG4 or NG3 Valve