


SUBSEA SAW 15 – 90 MM

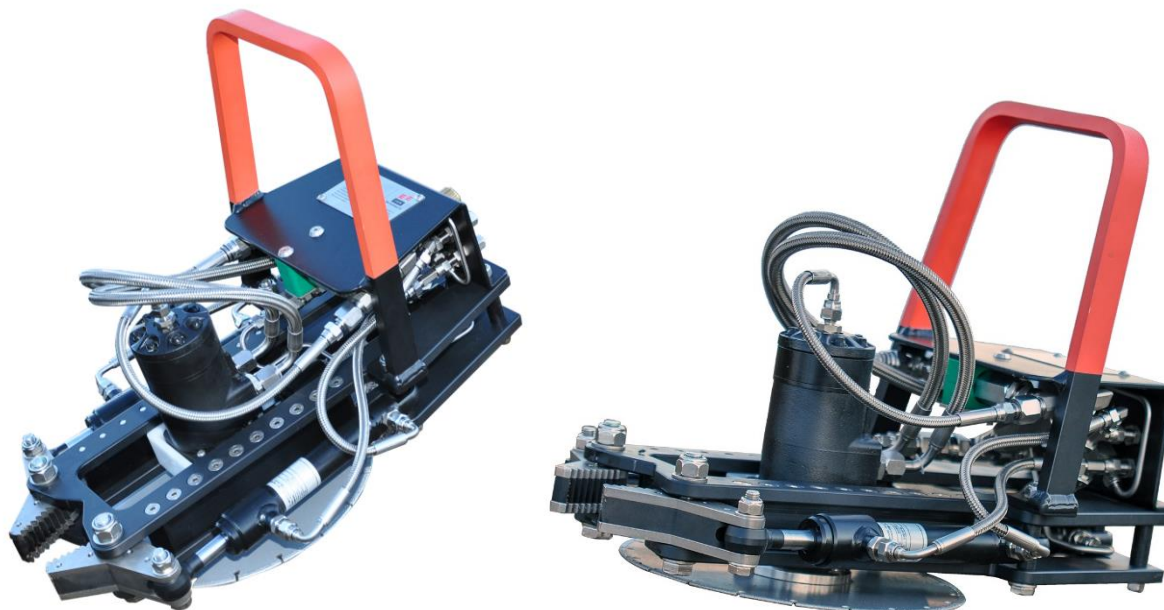

The IKM Subsea manipulator held **Subsea Saw** has a long track record. It is designed to cut steel pipes, profiles, flexible risers/cables and chains up to 90 mm.

SPECIFICATIONS

Type	Subsea Saw
Model	15 – 90 mm
Part number	IKM-6007084
Dimensions LxWxH	547 x 325 x 350 mm
Cutting diameter	Ø15 – Ø90
Saw blade	Ø305/Ø355
Motor	46 cc
Recommended feed rate	15-25 mm/min
Hydraulic Connections	2x 1/2" BSP (HF) 2x 1/4" BSP (LF)
Hydraulic pressure	165-185 bar
Hydraulic flow	50-55 LPM
Weight in air	34 kg
Weight in water	30 kg
Number of hydraulic connections	4 hoses (two functions) HF: Minimum NG6 Valve LF: NG4 or NG3 Valve

- Clamps can be modified to different interfaces and diameters if required.
- Standard blades supplied with the saw are Ø305/Ø355 carbide and diamond types.
- HF: Minimum NG6 Valve
- LF: NG4 or NG3 Valve

Data sheet no. DTB- IKM-6007084 Rev. 02